

Extractor<sup>™</sup> Series Fume Guns



Options, Consumables & Replacement Parts

# The RoboVent Extractor<sup>™</sup>

# Extract Weld Fumes at the Source Without Sacrificing Comfort

Think efficient weld fume control requires sacrificing operator comfort and weld quality? Think again. The RoboVent Extractor puts high-powered fume extraction into a lightweight, ergonomic fume gun that provides excellent control and maneuverability. In fact, you'll find it is as comfortable and easy to handle as your favorite standard weld torch.

- Intended for MIG and GMAW welding processes that employ shielding gases. Can also be used for FCAW.
- Collects 90-95% of weld fumes at the source, before they enter the welder's breathing zone.
- Perfect for large weldments, tight spaces and other environments where welders are highly mobile and source capture of weld fumes is challenging.

# Extraction OFF Extraction ON

# **How it Works**

The RoboVent Extractor consists of a welding gun with built-in fume extraction. The gun can be connected to a central dust collection system or to a stand-alone hi-vac dust collector.

- Faster gas flow: The design of the nozzle allows faster than normal shielding gas flow. Gas flow and extraction flow are well balanced to give a perfect weld in any position.
- Ergonomic grip design: The grip is designed to reduce hand fatigue and increase welder comfort.
- Flexible and maneuverable: A ball-and-socket joint between the gun handle and the hose offers flexibility and maneuverability.


# A Better Way to Protect Worker Health and Safety

Welding fumes are a health hazard, and welders who inhale too many fumes run a higher risk of developing asthma, bronchitis, COPD and cardiovascular disorders. As a result, OSHA and other international regulatory agencies are moving to more stringent thresholds for weld fume exposures.

The American Conference of Governmental Industrial Hygienists (ACGIH) recommended limit for welding fumes in the workplace is 1 milligram of welding fumes per cubic meter of air (1 mg/m.), over the span of an 8-hour workday.

The RoboVent Extractor collects weld fumes right at the source, before they escape into the welder's breathing zone or the ambient air. The Extractor can help you meet or exceed OSHA air quality regulations while reducing reliance on large ambient air quality systems or personal protective equipment (PPE).

# The RoboVent Extractor reduces the welder's exposure to welding fumes by up to 95%.\*

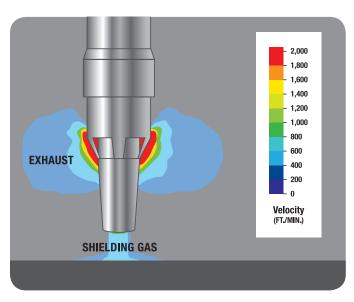

\*This applies to (pulling) underhand welding. The reduction in (pushing) overhand welding and very swift horizontal movements may be slightly less.











**WATER COOLED - 500 AMP** Extractor500 Rated at 500 amps with a 100% duty cycle, the water-cooled Extractor500 is the best choice for high-amperage, continuous-use applications. The water-cooled head reduces the size and weight

applications. Available with a 3-meter (9.8 feet), 4-meter (13.1 feet) or 5-meter (16.6 feet) tapered hose. 2.9 lbs. (1.30 kg) (at 3 feet off the ground).

necessary to handle high amperages. Available with a 3-meter (9.8 feet), 4-meter (13.1 feet), 5-meter (16.6 feet) or 6-meter (19.7 feet) tapered or standard hose. Choose from 45-degree or 60-degree metal necks or a 45-degree plastic neck. 3.2 lbs. (1.45 kg) (at 3 feet off the ground).

**Extract up to 95%** of weld fumes right at the source.

# Customize your fume gun for the perfect weld.

The perfect fume gun is the one that fits your unique needs. Choose from the following options to customize your Extractor fume gun for your application and welding style.

- · Plastic or metal neck
- 45° or 60° metal necks
- · Standard or Flex hose
- · Connections for your specific wire feeder
- Relief valve

# Wire Feed Connectors and Wiring Harnesses

We have wire feed connectors and wiring harnesses to fit every type of feeder or connector style, including Tweco connectors and popular Miller and Lincoln feeder styles. With our modular design, you can easily switch between different feeder models or connector styles.



# Extractor Handles & Necks

With a variety of handles and neck angles to choose from, you can customize your gun specifically to your needs.

Choose between our 45° and 60° chrome handles or our lightweight plastic 45° handle.



## **Extraction Hoses**

The Extractor comes with two hose options. Our standard hose is treated to protect against heat and sparks. Its smooth internal structure promotes effective extraction of fume and particulate. Our new Flex hose features increased flexibility in the first two meters to help you get to those hard-to-reach spots. Add the optional leather cover for added heat and spark protection on our standard hose (comes standard on the Flex hose).

# **Relief Valve**

The extractor relief valve reduces vacuum at the nozzle by 30% to help get into those tight corners.





# every application.

We have a full range of fume gun consumables for every welding application, from stainless steel to aluminum. Use genuine RoboVent replacement parts to ensure the best performance from your fume gun.

- Contact Tips
- Nozzles
- Liners



# **Contact Tips**

Our contact tips are specially designed to optimize performance for your Extractor fume gun, with a conical tip design that improves gas flow at the weld. Choose from:

- Standard copper (for everyday welding)
- · Tri-metal (for high-heat applications and stainless steel)
- · Specialty aluminum (copper nozzles for aluminum welding applications)

### **Nozzles**

We offer four different styles of nozzles to meet a variety of different welding needs. Our high-quality nozzles are built to withstand your high-production welding applications. Switch nozzles in seconds for added flexibility.

# 12mm Standard

The standard nozzle for the Extractor 250 and 500. The nozzles offer slightly wider shielding gas coverage on medium-thickness materials in butt and fillet applications, and outside-corner joints.

## **14mm**

Available for Extractor models 250 and 500. For heavierthickness, high-current and high-deposition butt- and lap-joint applications, this nozzle offers greater shielding gas coverage to help prevent porosity.

# 14mm Special

Available for the 250, 300 and 500. Where space is limited and fit is tight on acute-angled fillet joints, or into steep prepped roots on heavy-thickness butt-joints, this nozzle offers better access and greater shielding gas coverage to reduce porosity.

### 14mm Extended

Available for the Extractor250 and 500 (coming soon for the 300). The Extended nozzle is perfect for hard-toreach spots where the fume gun may be too big to fit.


### Liners

We offer a variety of liners for your wire diameter and type.

- Red: .035" .045" wire
- Yellow: .052" .062" wire
- Black: 052" .095" wire
- Teflon-coated: .035" .045" wire (for aluminum and stainless steel applications)



# Extractor250 🌚 AIR COOLED - 250 AMP 250 AMP, 100% DUTY CYCLE

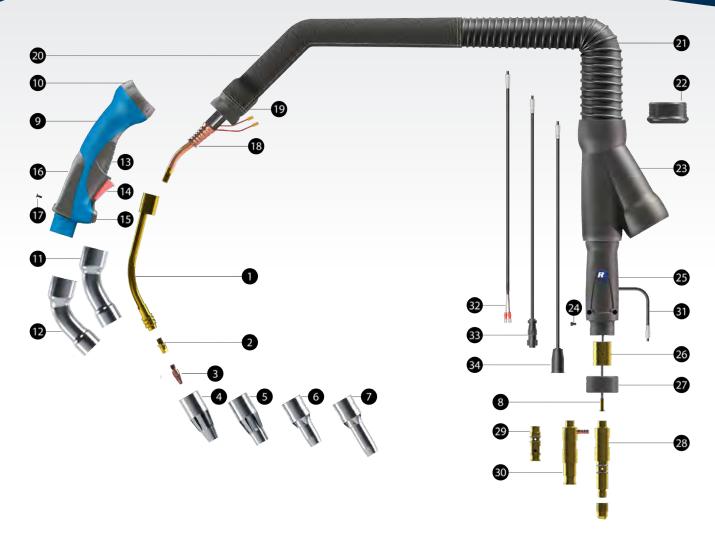

	PART NUMBER	DESCRIPTION	QTY
-	EXG-FM-AC250-3	Extractor250 Fume Gun 3 mtr Air Cooled	
-	EXG-FM-AC250-4	Extractor250 Fume Gun, 4 mtr Air Cooled	
-	EXG-FM-AC250-5	Extractor250 Fume Gun, 5 mtr Air Cooled	
0	EXG-FM-SW-AC	Swanneck Aircooled	1
2	EXG-FM-TA	Contact Tip Adapter	10
	EXG-FM-ADPT	Tip Holder Extension, 30mm Longer	5
8	EXG-FM-CT-035	Standard Contact Tip .035" (.9mm)	25
	EXG-FM-CT-040	Standard Contact Tip .040" (1mm)	25
	EXG-FM-CT-045	Standard Contact Tip .045" (1.2mm)	25
	EXG-FM-CT-AL-040	Aluminum Contact Tip .040" (1mm)	25
	EXG-FM-CT-AL-045	Aluminum Contact Tip .045" (1.2mm)	25
	EXG-FM-CT-CU-040	Tri Metal Contact Tip .040" (1mm)	25
	EXG-FM-CT-CU-045	Tri Metal Contact Tip .045" (1.2mm)	25
4	EXG-FM-NCE-120	12mm Conical Nozzle (15/32")	2
6	EXG-FM-NCE-140	14mm Conical Nozzle (35/64")	2

	PART NUMBER	DESCRIPTION	QTY
6	EXG-FM-NCE-140-EX	14mm Special Conical Nozzle (35/64")	2
7	EXG-FM-NCE-140-SP	14mm Special 30mm Ext. Conical Nozzle (35/64")	2
8	EXG-RL-3	Red 3M Liner for .035"045" wire	1
	EXG-RL-4	Red 4M Liner for .035"045" wire	1
	EXG-RL-5	Red 5M Liner for .035"045" wire	1
9	EXG-FM-EH-R	Handle Assembly	1
1	EXG-LBN	Locking Nut Bottom	1
•	EXG-SW-AC-MN-45	45° Chrome Neck	1
Ø	EXG-SW-AC-MN-60	60° Chrome Neck (coming soon)	1
B	EXG-BC	Bottom Cap Trigger Housing	1
14	EXG-RT	Trigger	1
	EXG-SPG	Trigger switch spring	5
	EXG-MS	Trigger Micro Switch	1
Œ	EXG-SH	Suspension Hook	1
16	EXG-BLC	Blind Back Cap	1



		The second secon	
	PART NUMBER	DESCRIPTION	QTY
Ø	EXG-SRW-M4	Screw for back cap/Central Connector Housing	25
18	EXG-FM-CC-3	3 Meter Coax Cable Assembly	1
	EXG-FM-CC-4	4 Meter Coax Cable Assembly	1
	EXG-FM-CC-5	5 Meter Coax Cable Assembly	1
19	EXG-CS	Ball and Socket Cable support	1
20	EXG-FM-LC-2	Leather Sheathing 30mm with Velcro 2 Meter	1
<b>a</b>	EXG-FM-FCB-3	Tapered Fume Extraction Hose 30-38mm 3 Mete	r 1
	EXG-FM-FCB-4	Tapered Fume Extraction Hose 30-38mm 4 Mete	r 1
	EXG-FM-FCB-5	Tapered Fume Extraction Hose 30-38mm 5 Mete	r 1
2	EXG-FM-CR	Hose Stiffening Ring (Contra Ring)	1
3	EXG-Y-HOU	Y Connector for Fume Hose	1
24	EXG-SRW-M4X10	Metal Screw M4x10 for USA Connection	10
23	EXG-HOU-US	Housing for Central Connector	1
26	EXG-US-A	Extractor Brass USA Adapter	1

	PART NUMBER	DESCRIPTION	ΤY
27	EXG-PER	Plastic End Ring for USA Adapter	1
28	EXG-MT	Miller Adapter Pin	1
29	EXG-TWT-N4	Tweco #4 Adapter	1
30	EXG-LT	Lincoln Adapter	2
<b>3</b>	EXG-QCC-EC	Quick Connect End Generic	1
<b>32</b>	EXG-QCC-TW-2ST	Quick Connect cable for Tweco (2ST)	1
<b>33</b>	EXG-QCC-M-4PM	Miller Quick Connect	1
34	EXG-QCC-L-2PL	Lincoln Quick Connect	1
<b>3</b>	EXG-TS	Tool Set (Cleaning Brush and Wrench)	1
36	EXG-GS	Gas Meter	1
<b>3</b>	EXG-AFM	Air Flow Meter	1
38	EXG-CB	Cleaning Brush	1
39	EXG-FM-AFM-ADP	Airflow Meter Adapter for Extractor250 Series	1
	EXG-FM-AFM-COMF	Airflow Meter with Extractor250 Adapter Complete	1






These tools will keep your fume gun operating at peak performance.

- Airflow Meter: This ensures you have the right amount of vacuum to keep your gun cool and keep the welding fume from escaping.
- Gas Meter: The gas meter is necessary to keep the right amount of shielding gas around the weld seam to prevent porosity.
- **Tool Kit:** The brush keeps your nozzle free of spatter and ensures smooth gas flow. The wrench ensures proper torque of your consumables.

# Extractor300 🍪 AIR COOLED - 300 AMP CO2 - 320 AMP, MIXED GASES - 300 AMP, 100% DUTY CYCLE

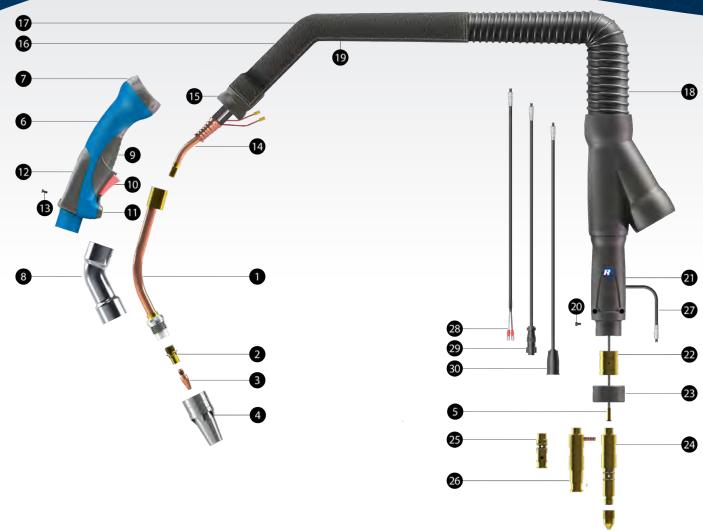

	PART NUMBER	DESCRIPTION	QTY
-	EXG-ID8-300-3-MN-45	Extractor300 Fume Gun 3mtr Air Cooled	1
-	EXG-ID8-300-4-MN-45	Extractor300 Fume Gun 4mtr Air Cooled	1
-	EXG-ID8-300-5-MN-45	Extractor300 Fume Gun 5mtr Air Cooled	1
-	EXG-ID8-300-6-MN-45	Extractor300 Fume Gun 6mtr Air Cooled	1
0	EXG-SW-AC-EF-MN-45	45° Chrome Neck & Aircooled Swanneck (8r	nm) 1
	EXG-SW-AC-EF-45	Swanneck 8mm Aircooled	1
2	EXG-TA-8MM	Tip Adapter	5
	EXG-TA-SP	Tip Holder Extension, 30mm Longer	5
8	EXG-CT-030	Standard Contact Tip .030" (.8mm)	25
	EXG-CT-035	Standard Contact Tip .035" (.9mm)	25
	EXG-CT-040	Standard Contact Tip .040" (1mm)	25
	EXG-CT-045	Standard Contact Tip .045" (1.2mm)	25
	EXG-CT-052	Standard Contact Tip .052" (1.4mm)	25
	EXG-CT-062	Standard Contact Tip .062" (1/16")(1.6mm)	25
	EXG-CT-AL-035	Aluminum Contact Tip .035" (.9mm)	25
	EXG-CT-AL-040	Aluminum Contact Tip .040" (1mm)	25


	PART NUMBER	DESCRIPTION	QTY
	EXG-CT-AL-045	Aluminum Contact Tip .045" (1.2mm)	25
	EXG-CT-AL-052	Aluminum Contact Tip .052" (1.4mm)	25
	EXG-CT-AL-062	Aluminum Contact Tip .062" (1/16") (1.6mr	n) 25
	EXG-CT-CU-035	Tri Metal Contact Tip .035" (.9mm)	25
	EXG-CT-CU-040	Tri Metal Contact Tip .040" (1mm)	25
	EXG-CT-CU-045	Tri Metal Contact Tip .045" (1.2mm)	25
	EXG-CT-CU-052	Tri Metal Contact Tip .052" (1.4mm)	25
	EXG-CT-CU-062	Tri Metal Contact Tip .062" (1/16") (1.6mm)	25
	EXG-CT-CU-078	Tri Metal Contact Tip .078" (5/64")(2mm)	25
	EXG-CT-CU-095	Tri Metal Contact Tip .095" (3/32")(2.4mm)	25
4	EXG-NCE-140-SCREW	14mm Threaded Conical Nozzle (35/64")	2
5	EXG-RL-3	Red 3M Liner for .035"045" wire	1
	EXG-RL-4	Red 4M Liner for .035"045" wire	1
	EXG-RL-5	Red 5M Liner for .035"045" wire	1
	EXG-RL-6	Red 6M Liner for .035"045" wire	1
	EXG-YL-3	Yellow 3M Liner for .052"062" wire	1



	PART NUMBER	DESCRIPTION	QTY
	EXG-YL-4	Yellow 4M Liner for .052"062" wire	1
	EXG-YL-5	Yellow 5M Liner for .052"062" wire	1
	EXG-YL-6	Yellow 6M Liner for .052"062" wire	1
	EXG-BL-3	Black 3M Liner for .052"095" wire	1
	EXG-BL-4	Black 4M Liner for .052"095" wire	1
	EXG-BL-5	Black 5M Liner for .052"095" wire	1
	EXG-BL-6	Black 6M Liner for .052"095" wire	1
	EXG-BL-ALU-3	Black 3M Liner for Aluminum wire	1
	EXG-BL-ALU-4	Black 4M Liner for Aluminum wire	1
	EXG-BL-ALU-5	Black 5M Liner for Aluminum wire	1
	EXG-BL-ALU-6	Black 6M Liner for Aluminum wire	1
6	EXG-EH-R	Handle with Neck (Complete)	1
	EXG-EF-BL-HD	Handle Assembly	1
0	EXG-LBN	Locking Nut Bottom	1
8	XG-SW-AC-MN-45	45° Chrome Neck (8mm)	1
9	EXG-BC	Bottom Cap Trigger Housing	1
1	EXG-RT	Trigger	1
	EXG-SPG	Trigger switch spring	5
	EXG-MS	Trigger Micro Switch	1
•	EXG-SH	Suspension Hook	1
P	EXG-BLC	Blind Back Cap	1
B	EXG-SRW-M4	Screw for Central Connector Housing	10
14	EXG-ID8-CC-AL-3	3 Meter Coax Cable Assembly	1
	EXG-ID8-CC-AL-4	4 Meter Coax Cable Assembly	1
	EXG-ID8-CC-AL-5	5 Meter Coax Cable Assembly	1
	EXG-ID8-CC-AL-6	6 Meter Coax Cable Assembly	1

Ball and Socket Cable support  EXG-LC-2 Leather Sheathing with Velcro 2 Meter  EXG-LC-3 Leather Sheathing with Zipper 3 Meter  EXG-LC-4 Leather Sheathing with Zipper 4 Meter  EXG-LC-5 Leather Sheathing with Zipper 5 Meter  EXG-LC-6 Leather Sheathing with Zipper 6 Meter  EXG-FCB-3 Tapered Fume Extraction Hose Flex 1 Meter  EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 3 Meter  EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-6 Coupler Between Flex and Standard Hose  EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection  DEXG-HOU Housing for Central Connector  EXG-HOU Housing for Central Connector  EXG-PER Plastic End Ring for USA Adapter  Miller Adapter Pin  EXG-TWT-N4 Tweco #4 Adapter	r 1
EXG-LC-3 Leather Sheathing with Zipper 3 Meter EXG-LC-4 Leather Sheathing with Zipper 4 Meter EXG-LC-5 Leather Sheathing with Zipper 5 Meter EXG-LC-6 Leather Sheathing with Zipper 6 Meter  (7) EXG-EF-FH-1M RoboVent Extractor Suction Hose Flex 1 Meter EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 3 Meter EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 4 Meter EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter (9) EXG-EF-FH-CN Coupler Between Flex and Standard Hose (10) EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection (11) EXG-HOU Housing for Central Connector (12) EXG-US-A Extractor Brass USA Adapter (13) EXG-PER Plastic End Ring for USA Adapter (14) EXG-MT Miller Adapter Pin	1 1 1 1 1 1 r 1 1 r 1 1 1
EXG-LC-4 Leather Sheathing with Zipper 4 Meter EXG-LC-5 Leather Sheathing with Zipper 5 Meter EXG-LC-6 Leather Sheathing with Zipper 6 Meter  (7) EXG-EF-FH-1M RoboVent Extractor Suction Hose Flex 1 Meter (8) EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 3 Meter EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 4 Meter EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter (9) EXG-EF-FH-CN Coupler Between Flex and Standard Hose (10) EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection (11) EXG-HOU Housing for Central Connector (12) EXG-US-A Extractor Brass USA Adapter (13) EXG-PER Plastic End Ring for USA Adapter (14) EXG-MT Miller Adapter Pin	1 1 1 1 1 r 1 r 1 r 1
EXG-LC-5 Leather Sheathing with Zipper 5 Meter EXG-LC-6 Leather Sheathing with Zipper 6 Meter  1 EXG-EF-FH-1M RoboVent Extractor Suction Hose Flex 1 Meter 1 EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 3 Meter 1 EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 4 Meter 1 EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter 2 EXG-EF-FH-CN Coupler Between Flex and Standard Hose 2 EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection 2 EXG-HOU Housing for Central Connector 2 EXG-US-A Extractor Brass USA Adapter 2 EXG-PER Plastic End Ring for USA Adapter 2 EXG-MT Miller Adapter Pin	1 1 1 1 r 1 r 1 r 1 1
EXG-LC-6 Leather Sheathing with Zipper 6 Meter  17 EXG-EF-FH-1M RoboVent Extractor Suction Hose Flex 1 Meter  18 EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 3 Mete  19 EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 5 Mete  10 EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Mete  20 EXG-SRW-M4X10 Coupler Between Flex and Standard Hose  20 EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection  21 EXG-HOU Housing for Central Connector  22 EXG-US-A Extractor Brass USA Adapter  23 EXG-PER Plastic End Ring for USA Adapter  24 EXG-MT Miller Adapter Pin	1 1 r 1 r 1 r 1
Tapered Fume Extraction Hose Flex 1 Meter  EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 3 Meter  EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-1 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-1 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-2 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-1 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-1 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-2 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-FCB-6 Tapered Fume Extraction Hose 36-4	1 r 1 r 1 r 1
B EXG-FCB-3 Tapered Fume Extraction Hose 36-44mm 3 Mete EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 4 Mete EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Mete  B EXG-EF-FH-CN Coupler Between Flex and Standard Hose EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection EXG-HOU Housing for Central Connector EXG-US-A Extractor Brass USA Adapter EXG-PER Plastic End Ring for USA Adapter EXG-MT Miller Adapter Pin	r 1 r 1 r 1
EXG-FCB-4 Tapered Fume Extraction Hose 36-44mm 4 Mete EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Mete SEXG-EF-FH-CN Coupler Between Flex and Standard Hose EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection EXG-HOU Housing for Central Connector EXG-US-A Extractor Brass USA Adapter Plastic End Ring for USA Adapter EXG-MT Miller Adapter Pin	r 1 r 1
EXG-FCB-5 Tapered Fume Extraction Hose 36-44mm 5 Meter  EXG-EF-FH-CN Coupler Between Flex and Standard Hose  EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection  EXG-HOU Housing for Central Connector  EXG-US-A Extractor Brass USA Adapter  EXG-PER Plastic End Ring for USA Adapter  EXG-MT Miller Adapter Pin	r 1
EXG-EF-FH-CN Coupler Between Flex and Standard Hose EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection EXG-HOU Housing for Central Connector EXG-US-A Extractor Brass USA Adapter EXG-PER Plastic End Ring for USA Adapter EXG-MT Miller Adapter Pin	1
<ul> <li>EXG-SRW-M4X10 Metal Screw M4x10 for USA Connection</li> <li>EXG-HOU Housing for Central Connector</li> <li>EXG-US-A Extractor Brass USA Adapter</li> <li>EXG-PER Plastic End Ring for USA Adapter</li> <li>EXG-MT Miller Adapter Pin</li> </ul>	
<ul> <li>EXG-HOU Housing for Central Connector</li> <li>EXG-US-A Extractor Brass USA Adapter</li> <li>EXG-PER Plastic End Ring for USA Adapter</li> <li>EXG-MT Miller Adapter Pin</li> </ul>	10
<ul> <li>EXG-US-A Extractor Brass USA Adapter</li> <li>EXG-PER Plastic End Ring for USA Adapter</li> <li>EXG-MT Miller Adapter Pin</li> </ul>	
23 EXG-PER Plastic End Ring for USA Adapter 24 EXG-MT Miller Adapter Pin	1
24 EXG-MT Miller Adapter Pin	1
<u> </u>	1
<b>EXG-TWT-N4</b> Tweco #4 Adapter	1
	1
23 EXG-LT Lincoln Adapter	2
27 EXG-QCC-EC Quick Connect End Generic	1
23 <b>EXG-QCC-TW-2ST</b> Quick Connect cable for Tweco (2ST)	1
29 EXG-QCC-M-4PM Miller Quick Connect	1
30 EXG-QCC-L-2PL Lincoln Quick Connect	1
3) <b>EXG-TS</b> Tool Set (Cleaning Brush and Wrench)	1
32 EXG-GS Gas Meter	1
33 EXG-AFM Air Flow Meter	
<b>EXG-CB</b> Cleaning Brush	1

# Extractor500 🚱 WATER COOLED - 500 AMP CO2 - 550 AMP, MIXED GASES - 500 AMP, 100% DUTY CYCLE

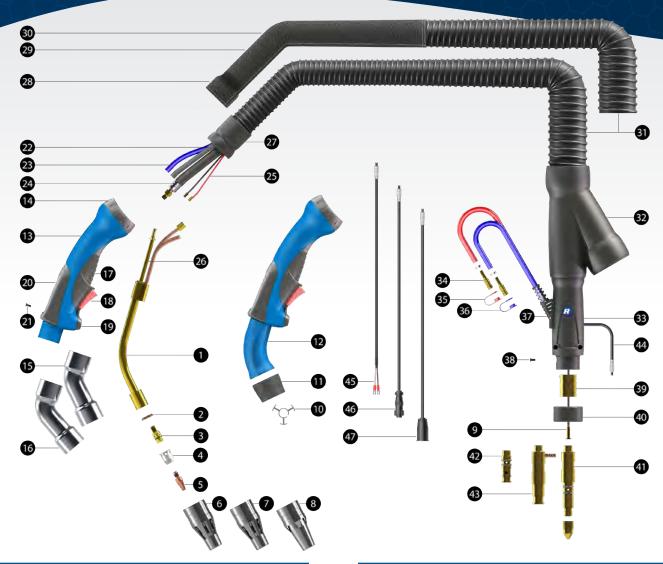

	PART NUMBER	DESCRIPTION	QTY
-	EXG-AC500-3	Extractor500 Fume Gun 3mtr Water Cooled	1
-	EXG-AC500-4	Extractor500 Fume Gun 4mtr Water Cooled	1
-	EXG-AC500-5	Extractor500 Fume Gun 5mtr Water Cooled	1
-	EXG-AC500-6	Extractor500 Fume Gun 6mtr Water Cooled	1
0	EXG-SW-WC	Extractor Swanneck Water Cooled	1
2	EXG-IS-ESWN	Insulating Washer/Insulating Ring	5
3	EXG-TA	Tip Adapter	5
4	EXG-TA-TR-450	Ceramic Conical Diffuser	5
6	EXG-CT-030	Standard Contact Tip .030" (.8mm)	25
	EXG-CT-035	Standard Contact Tip .035" (.9mm)	25
	EXG-CT-040	Standard Contact Tip .040" (1mm)	25
	EXG-CT-045	Standard Contact Tip .045" (1.2mm)	25
	EXG-CT-052	Standard Contact Tip .052" (1.4mm)	25
	EXG-CT-062	Standard Contact Tip .062" (1/16")(1.6mm)	25
	EXG-CT-AL-035	Aluminum Contact Tip .035" (.9mm)	25
	EXG-CT-AL-040	Aluminum Contact Tip .040" (1mm)	25

	PART NUMBER	DESCRIPTION	QTY
	EXG-CT-AL-045	Aluminum Contact Tip .045" (1.2mm)	25
	EXG-CT-AL-052	Aluminum Contact Tip .052" (1.4mm)	25
	EXG-CT-AL-062	Aluminum Contact Tip .062" (1/16") (1.6mm)	25
	EXG-CT-CU-035	Tri Metal Contact Tip .035" (.9mm)	25
	EXG-CT-CU-040	Tri Metal Contact Tip .040" (1mm)	25
	EXG-CT-CU-045	Tri Metal Contact Tip .045" (1.2mm)	25
	EXG-CT-CU-052	Tri Metal Contact Tip .052" (1.4mm)	25
	EXG-CT-CU-062	Tri Metal Contact Tip .062" (1/16") (1.6mm)	25
	EXG-CT-CU-078	Tri Metal Contact Tip .078" (5/64")(2mm)	25
	EXG-CT-CU-095	Tri Metal Contact Tip .095" (3/32")(2.4mm)	25
6	EXG-NCE-120	12mm Conical Nozzle (15/32")	2
7	EXG-NCE-140-CON	14mm Conical Nozzle (35/64")	2
8	EXG-NCE-140	14mm Special Conical Nozzle (35/64")	2
9	EXG-RL-3	Red 3M Liner for .035"045" wire	1
	EXG-RL-4	Red 4M Liner for .035"045" wire	1
	EXG-RL-5	Red 5M Liner for .035"045" wire	1



	PART NUMBER	DESCRIPTION	QTY
	EXG-RL-6	Red 6M Liner for .035"045" wire	1
	EXG-YL-3	Yellow 3M Liner for .052"062" wire	1
	EXG-YL-4	Yellow 4M Liner for .052"062" wire	1
	EXG-YL-5	Yellow 5M Liner for .052"062" wire	1
	EXG-YL-6	Yellow 6M Liner for .052"062" wire	1
	EXG-BL-3	Black 3M Liner for .052"095" wire	1
	EXG-BL-4	Black 4M Liner for .052"095" wire	1
	EXG-BL-5	Black 5M Liner for .052"095" wire	1
	EXG-BL-6	Black 6M Liner for .052"095" wire	1
	EXG-BL-ALU-3	Black 3M Liner for Aluminum wire	1
	EXG-BL-ALU-4	Black 4M Liner for Aluminum wire	1
	EXG-BL-ALU-5	Black 5M Liner for Aluminum wire	1
	EXG-BL-ALU-6	Black 6M Liner for Aluminum wire	1
10	EXG-PR-SWN	Positioning Ring	5
•	EXG-LBN-N	Locking Ring Nozzle Side	1
<b>D</b>	EXG-EH-R	Handle with Neck (Complete)	1
B	EXG-EF-BL-HD	Handle Assembly	1
14	EXG-LBN	Locking Nut Bottom	1
Œ	EXG-SW-WC-MN-45	45° Chrome Neck	1
16	EXG-SW-WC-MN-60	60° Chrome Neck	1
<b>D</b>	EXG-BC	Bottom Cap Trigger Housing	1
18	EXG-RT	Trigger	1
	EXG-SPG	Trigger switch spring	5
	EXG-MS	Trigger Micro Switch	1
<b>P</b>	EXG-SH	Suspension Hook	1
20	EXG-BLC	Blind Back Cap	1
<b>a</b>	EXG-SRW-M4	Screw for back cap/Central Connector Housing	25
2	EXG-WC-OL-3M	Outer Liner 3 Meter (incl. connection tube)	1
	EXG-WC-OL-4M	Outer Liner 4 Meter (incl. connection tube)	1
	EXG-WC-OL-5M	Outer Liner 5 Meter (incl. connection tube)	1
	EXG-WC-OL-6M	Outer Liner 6 Meter (incl. connection tube)	1
23	EXG-WC-IN-BL	Water inlet hose 5x8mm blue per meter	1
	EXG-WC-OU-RD	Water outlet hose 5x8mm red per peter	1
24	EXG-WC-PWC-3	Power/Water cable 3 meter	1

	PART NUMBER	DESCRIPTION	YT9
	EXG-WC-PWC-4	Power/Water cable 4 meter	1
	EXG-WC-PWC-5	Power/Water cable 5 meter	1
	EXG-WC-PWC-6	Power/Water cable 6 meter	1
25	EXG-WC300-TW	Trigger Wire 1 x 0.75mm2 per meter	1
26	EXG-WC-CT	Connection tube	1
27	EXG-CS	Ball and Socket Cable support	1
28	EXG-LC-2	Leather Sheathing with Velcro 2 Meter	1
29	EXG-EF-FH-1M	RoboVent Extractor Suction Hose Flex 1 Meter	1
30	EXG-EF-FH-CN	Coupler Between Flex and Standard Hose	1
<b>1</b>	EXG-FCB-3	Tapered Fume Extraction Hose 36-44mm 3 Meter	1
	EXG-FCB-4	Tapered Fume Extraction Hose 36-44mm 4 Meter	1
	EXG-FCB-5	Tapered Fume Extraction Hose 36-44mm 5 Meter	1
	EXG-FCB-6	Tapered Fume Extraction Hose 36-44mm 6 Meter	1
<b>3</b>	EXG-Y-HOU	Y Connector for Fume Hose	1
33	EXG-HOU-US	Housing for Central Connector	1
34	EXG-WC-QC-N	Quick connect nipple for water hose	1
35	EXG-WC-RD-CP	Waterstop Red (cap)	1
<b>36</b>	EXG-WC-BL-CP	Waterstop Blue (cap)	1
<b>3</b>	EXG-WC-GDE	Water hose guide	1
38	EXG-WC-CPT	Copper tube for water hose	1
39	EXG-US-A	Extractor Brass USA Adapter	1
40	EXG-PER	Plastic End Ring for USA Adapter	1
4	EXG-MT	Miller Adapter Pin	1
42	EXG-TWT-N4	Tweco #4 Adapter	1
<b>4</b> 3	EXG-LT	Lincoln Adapter	2
44	EXG-QCC-EC	Quick Connect End Generic	1
<b>4</b> 5	EXG-QCC-TW-2ST	Quick Connect cable for Tweco (2ST)	1
46	EXG-QCC-M-4PM	Miller Quick Connect	1
47	EXG-QCC-L-2PL	Lincoln Quick Connect	1
<b>4</b> 8	EXG-TS	Tool Set (Cleaning Brush and Wrench)	1
49	EXG-GS	Gas Meter	1
<b>9</b>	EXG-AFM	Air Flow Meter	1
<b>⑤</b>	EXG-CB	Cleaning Brush	1

Manual Welding Fume Extraction





Integrated Cooling Equipment



Robotic Welding Fume Collection



Maintenance Programs



Oil Mist Extraction



Full-Plant / Ambient Air Cleaning Systems





Mobile Dust Collectors



Laser & Plasma Cutting Fume Collection









Improving Lives through Clean Air™

ROBOVENT.COM • 888.ROBOVENT INFO@ROBOVENT.COM

